


Polipastos cromadas de cadena



| CLAVE | CAP. (TON) | LARGO DE CADENA (METROS) | PESO (KG) | ESLABÓN MM (CADENA) | | FUERZA (N) | MILÍMETROS | | | | | | REFACCIONES | | | | | | | |
|--------|---------------|-----------------------------|--------------|---------------------|----|---------------|------------|-----|-----|------|-----|------|-----------------|--------|---------|-----------|---------|---------|----------|--------------------|
| | | | | X | Y | | A | B | C | O | D | E | H (ALTURA MIN.) | CADENA | BALATAS | TRINQUETE | GATILLO | RESORTE | PESTILLO | ENSAMBLE DE GANCHO |
| HB5010 | 0.75 | 1.5 | 6.9 | 6 | 18 | 265 | 148 | 87 | 132 | 35.5 | 278 | 27 | 330 | HB5070 | HB5105 | HB5113 | HB5118 | HB5148 | HB5145 | HB5156 |
| HB5011 | 1 | 1.5 | 7.9 | 6 | 18 | 270 | 153 | 90 | 140 | 37.5 | 278 | 29 | 365 | HB5070 | HB5105 | HB5113 | HB5118 | HB5148 | HB5141 | HB5157 |
| HB5012 | 1.5 | 1.5 | 10.9 | 7 | 21 | 295 | 173 | 99 | 145 | 42.5 | 378 | 33.5 | 400 | HB5071 | HB5106 | HB5114 | HB5119 | HB5148 | HB5146 | HB5158 |
| HB5013 | 3 | 1.5 | 20.7 | 10 | 30 | 335 | 200 | 112 | 199 | 50 | 418 | 40 | 520 | HB5073 | HB5107 | HB5115 | HB5119 | HB5149 | HB5143 | HB5160 |
| HB5014 | 6 | 1.5 | 28.1 | 10 | 30 | 370 | 200 | 112 | 230 | 53 | 418 | 42.5 | 640 | HB5073 | HB5107 | HB5115 | HB5119 | HB5149 | HB5147 | HB5162 |

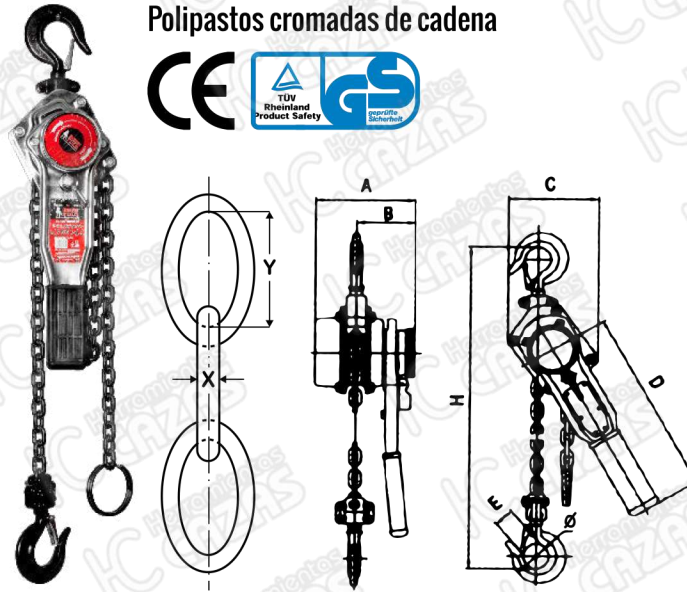

| CLAVES CADENAS | TIPO | LARGO DE CADENA (METROS) | ESLABÓN MM (CADENA) | |
|----------------|----------|--------------------------|---------------------|----|
| | | | X | Y |
| HB5070 | Grado 80 | 10 | 6 | 18 |
| HB5071 | Grado 80 | 6 | 7 | 21 |
| HB5073 | Grado 80 | 10 | 10 | 30 |

Facilitan el mantenimiento
Cumplen con las normas internacionales de seguridad más estrictas como CE, TÜV y GS

